



**ARTEL**


[www.artelpelletkachel.nl](http://www.artelpelletkachel.nl)





**NIEUW IN HET ASSORTIMENT**

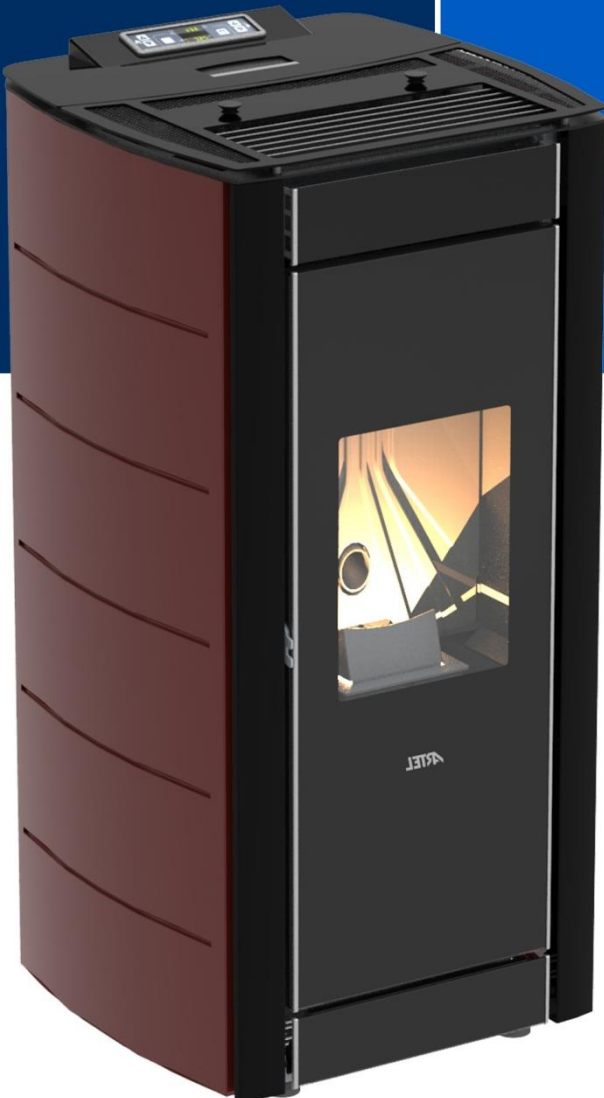

**Pelletkachel  
Elite**



 = 98 %

ELITE 98		6		8		10 *2		12 *2	
	Eenheid	Max.	Min.	Max.	Min.	Max.	Min.	Max.	Min.
 Vermogen	kW	6,60	1,50	8	2,45	10	2.45	11.75	2.45
 Rendement	%	97,8	95,5	97,8	95,5	97,8	93.5	97,8	93.5
 Rookgas Temp.	°C	85,2	75	97,9	75	120	85	140	85
 Afvoer Diam	mm	Ø 80		Ø 80		Ø 80		Ø 80	
 Inlaat Diam.	mm	Ø 50		Ø 50		Ø 50		Ø 50	
 Pellettank Inh.	kg	17		17		17		17	
 Pellet diameter	mm	Ø 6		Ø 6		Ø 6		Ø 6	
 Verbruik / uur	kg/h	1,3	0,5	1,65	0,8	2	0,8	2.4	0,95
 Branduren/tank	h	67	15	34	10	34	8	34	7
 Oppervlakte	m <sup>2</sup>	*1 60		*1 70		*1 75		*1 80	
 Gewicht	kg	105		105		105		110	
 Aantal	Aantal	0		0		1		1	
Afmeting	hxbxd	970x520x505		970x520x505		1060x492x505		1060x520x505	
Keramische gloeikaars		Ja		Ja		Ja		Ja	

\*1 Verwarmbaar volume is gebaseerd op een redelijk tot goed geïsoleerde woning met standaard kamerhoogte van ± 260 cm.

\*2 Komt standaard met 1 x kanalisatie aan de achterzijde